

Flashings and closures are made for particular applications and locations on the roof, with variations to suit the specific profile being used.

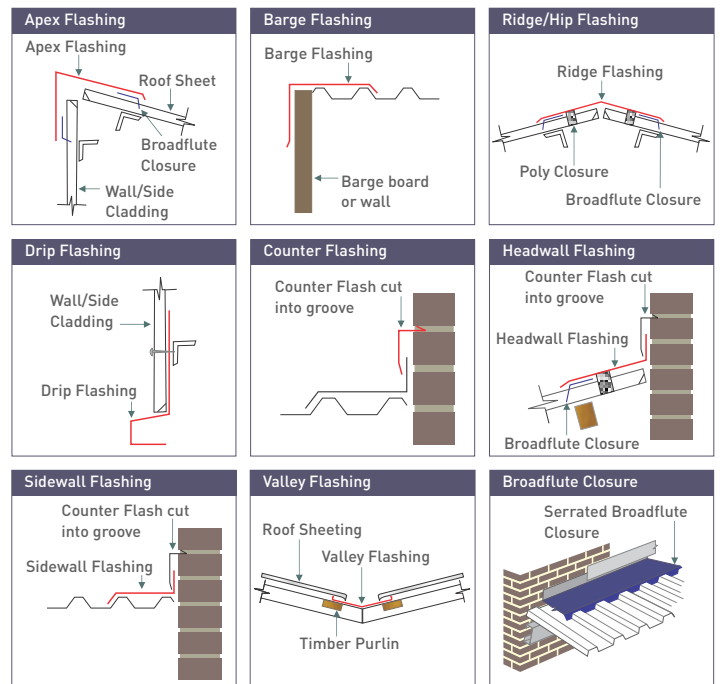
Industrial and commercial flashings tend to be functional more than aesthetic, and Safintra makes a range of standard flashings which are suitable for this purpose.






Residential flashings however, usually have an important aesthetic role which necessitates that they are designed for the structure in question.
















Safintra is able to produce most custom designed flashings for residential and other applications- please ask your local branch for more information.

Flashings are usually made in the same material as the roof, for colour matching. Safintra flashings are offered in Aluminium-Zinc coated steel and Aluminium. All counter flashings are sealed with silicone - not cement.

Please speak to our flashings departments for further guidance and technical assistance.



PIERCED FIX		TUFDEK	WIDEDEK	FLUTELINE	Trimflute	classiccrr
<b>Apex Flashing</b> 	Dimensions (A x B)	231 x 231				
	Angle	As required				
	Girth	462				
<b>Barge Flashing</b> 	Dimensions (A x B)	231 x 231				
	Angle	90°				
	Girth	462				
<b>Ridge Flashing</b> 	Dimensions (A x B)	231 x 231				
	Angle	As required				
	Girth	462				
<b>Roll Top Ridge Flashing</b> 	Dimensions (A x B)	231 x 231				
	Angle	140°				
<b>Hip Cap</b> 	Dimensions (A x B)	231 x 231				
	Angle	As required				
	Girth	462				
	Comments	Use with fluted closure.			No closure.	

PIERCED FIX		TUFDEK 	WIDEDEK 	FLUTELINE 	Trimflute 	classi corr  corrugated
<b>Broad Flute Closure</b> 	Length of closure	686	760	889	N/A	N/A
	Comments	Need one closure per roof sheet.			No closure	
<b>Drip Flashing</b> 	Dimensions (A x B x C x D)	60 x 50 x 20 x 24				
	Angle	92°				
	Girth	154	231	154	231	231
<b>Counter Flashing</b> 	Dimensions (A x B)	30 x 112				
	Angle	(i)22.5° (ii)88°				
	Girth	154				
<b>Headwall Flashing</b> 	Dimensions (A x B)	75 x 231				
	Angle	As required				
	Girth	308				
<b>Side Wall Flashing</b> 	Dimensions (A x B)	77 x 231	77 x 231	77 x 231	63 x 245	77 x 221
	Angle	90°				
	Girth	308				
<b>External Corner</b> 	Dimensions (A x B)	231 x 231				
	Angle	90°				
	Girth	462				
<b>Internal Corner</b> 	Dimensions (A x B)	231 x 231				
	Angle	90°				
	Girth	462				
<b>Valley Flashing</b> 	Dimensions (A x B)	231 x 231				
	Angle	As required				
	Girth	462				
<b>Roll Top Valley Flashing</b> 	Dimensions (A x B)	231 x 231				
	Angle	140°				
	Girth	462				
<b>Under-Over Flashing</b> 	Dimensions (A x B)	231 x 231				
	Angle	As required				
	Girth	462				

All dimensions given in millimetres