

PIERCED FIX FLASHINGS AND CLOSURES


Flashings and closures are made for particular applications and locations on the roof, with variations to suit the specific profile being used.



Industrial and commercial flashings tend to be functional more than aesthetic. Safintra makes a range of standard flashings which are suitable for this purpose.









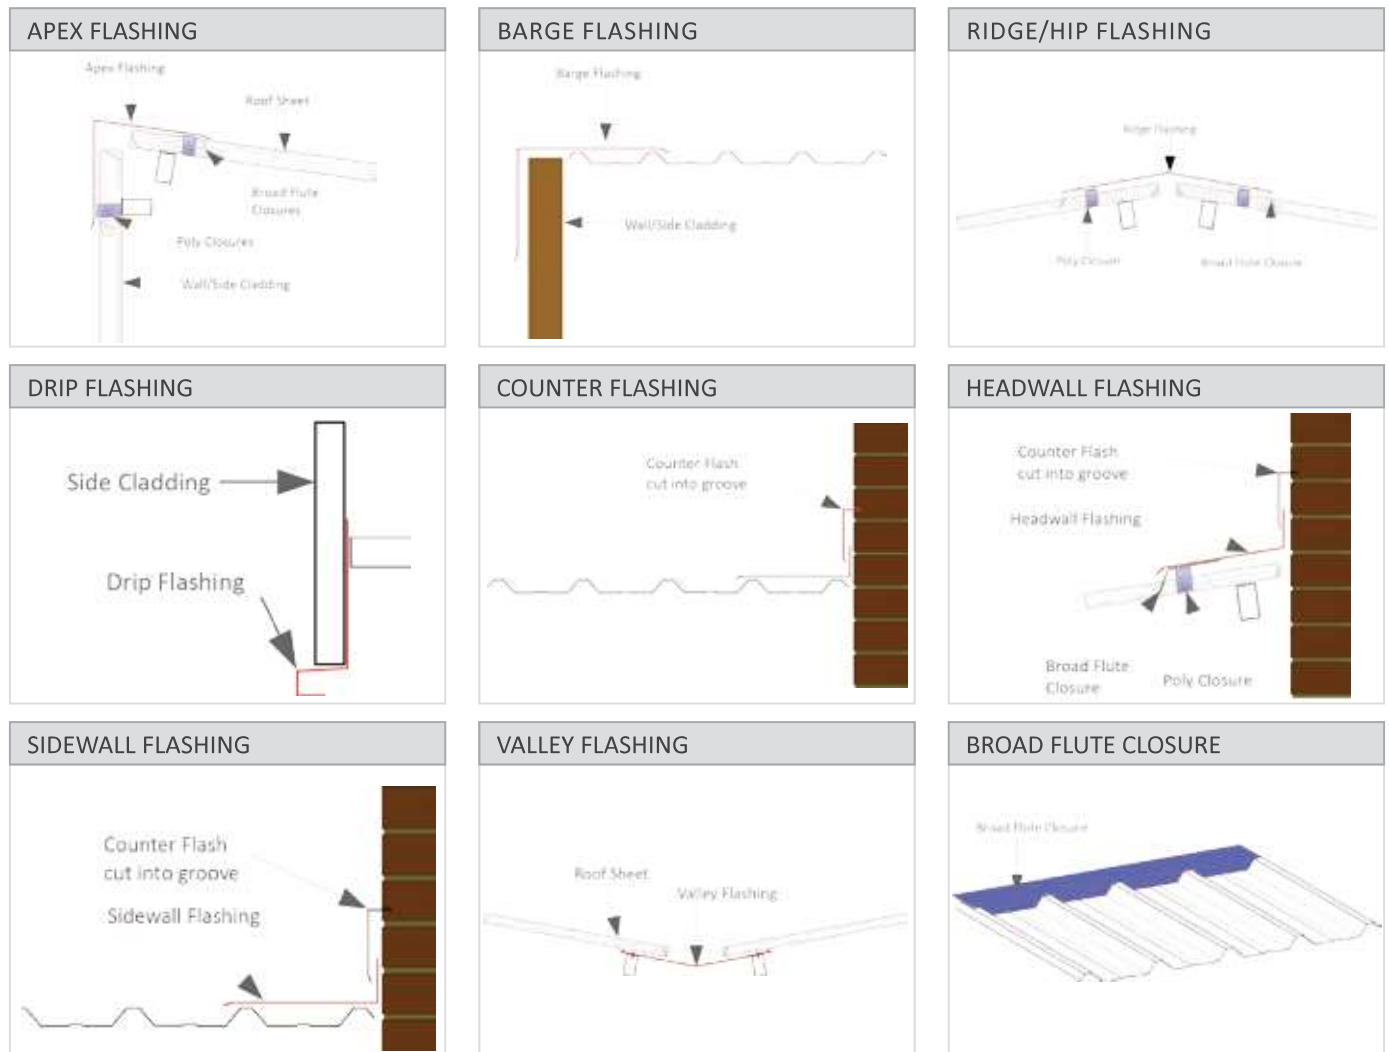




Residential flashings however, usually have an important aesthetic role which necessitates that they are designed for the structure in question.

Safintra is able to produce most custom designed flashings for residential and other applications. Please ask your local branch for more information.

Flashings are usually made in the same material as the roof, for colour matching. Safintra flashings are offered in Aluminium-Zinc coated steel and Aluminium. All counter flashings are to be sealed with a neutral cure silicone - not cement.



PIERCED FIX		classicro corrugated	TUFDEK	WIDEDEK	FLUTELINE	Trimflute
Apex Flashing		Dimensions	231 x 231			
		Angle	Calculation: 90° - Roof Pitch			
		Girth	462			
		Comment	Use with broad flute closures + poly closures			
Barge Flashing		Dimensions	231 x 231			
		Angle	90°			
		Girth	462			

PIERCED FIX		classi corr corrugated	TUFDEK	WIDEDEK	FLUTELINE	Trimflute
Ridge Flashing 	Dimensions	231 x 231				
	Angle	Calculation: $180^\circ - (2 \times \text{Roof pitch})$				
	Girth	462				
	Comment	Use with broad flute closures + poly closures				
Roll Top Ridge Flashing 	Dimensions	231 x 231				
	Angle	140° Standard				
	Girth	462				
	Comment	Use with broad flute closures + poly closures				
Hip Cap 	Dimensions	231 x 231				
	Angle	Calculation: $180^\circ - 1.5 \times \text{Roof Pitch}$				
	Girth	462				
	Comment	Use with blank closures notched + poly blocks				
Drip Flashing 	Dimensions	60 x 50 x 20 x 24				
	Angle	92°				
	Girth	154				
Counter Flashing 	Dimensions	SB 12 x 30 x 112				
	Angle	i)22,5° ii)88°				
	Girth	154				
	Comment	SB -> Sharp Bend G275				
Headwall Flashing 	Dimensions	77 x 231				
	Angle	Calculation: $90^\circ + \text{Roof pitch}$				
	Girth	308				
SideWall Flashing 	Dimensions	77 x 231	77 x 231	77 x 231	63 x 245	77 x 231
	Angle	90°				
	Girth	308				
External Corner 	Dimensions	231 x 231				
	Angle	90°				
	Girth	462				
Internal Corner 	Dimensions	231 x 231				
	Angle	90°				
	Girth	462				
Valley Flashing 	Dimensions	231 x 231				
	Angle	Calculation: $180^\circ - 1,5 \text{ Roof pitch}$				
	Girth	462				
	Comment	SB -> G550 -> Normal Std bend -> G275 -> Sharp bend 22,5°				
Roll Top Valley Flashing 	Dimensions	231 x 231				
	Angle	140° Standard				
	Girth	462				
Under-Over Flashing 	Dimensions	231 x 231				
	Angle	Calculation: $180^\circ - (i-ii)$				
	Girth	462				
Broad flute Closure	Length Of Closure	N/A	700	775	900	1020
Need one closure per roof sheet	Profile					

PIERCED FIX

All dimensions given in millimetres.
Diagrams are for illustrative purposes only.

Note

SB = Standard bend is 15mm included at 15°, unless otherwise stated